



# 16CH POE NETWORK RECORDER

INTNVR216P



## KEY FEATURES

- Up to 16ch IP cameras access
- Up to 8MP resolution recording
- Support face recognition (AI by NVR)
- Intelligent analysis by NVR: Intrusion (support the accurate detection of vehicle and human)
- 2 SATA hard disk, up to 12TB for each HDD
- 1 RJ45 10M/100M/1000M network interface
- 16ch POE ports
- Smart search & playback
- Support cloud upgrade

FIRE • SECURITY • INTERCOMS

17 Millicent Street, Burwood, VIC 3125 Australia  
Tel: 1300 PSA PRODUCTS (1300 772 776)  
Fax: (03) 9888 9993  
enquiry@psaproducts.com.au

psaproducts.com.au







## SPECIFICATIONS

Model	INTNVR216P	
Video Input	IP Camera Input	16 Channel
	Incoming Bandwidth	112 Mbps
	Outgoing Bandwidth	112 Mbps
Video Output	HDMI Output	3840×2160,1920×1080, 1440×900, 1280×1024
	VGA Output	1920×1080, 1440×900, 1280×1024
	Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1, 16ch D1@30fps
	Dual Stream	Support
	Multi-screen Display	1/4/8/9/16
Recoding	Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
	Recording Mode	Manual, Schedule (Regular, Continuous), Event
	Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Playback and Backup	Sync Playback	16/9/4/1
	Search Mode	Time /Date, Alarm, Picture grid, Event
	Backup Mode	USB Device, Network
Alarm	General Alarm	Motion Detection, Video Loss, Alarm in, Alarm out, IVS (by camera)
	Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
	Intelligent Analysis	Intrusion (support the accurate detection of vehicle and human)
Network	Interface	1 RJ-45 port (10/100/1000 Mbps)
	PoE	16 Ports (IEEE 802.3af), 128W
	Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
	Remote Users	8 users
	Smart Phone	iPhone, iPad, Android
	Interoperability	ONVIF, SDK, CGI
	Storage	HDD
	Cloud Storage	Support
Interface	Audio I/O	1/1
	Alarm Input	8ch
	Alarm Output	2ch
	USB	3 ports (USB 2.0 × 3)
General	Power Supply	AC100 ~ 240V
	Power Consumption	< 15 W (without HDD)
	Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
	Storage Conditions	Less than 90% RH
	Certifications	CE/FCC
	Dimensions	372 × 310.5 × 46.5 mm (16.65 × 12.2 × 2.2 inch)
	Net Weight	2.75 kg (6.05 lb) without HDD



## DIMENSIONS

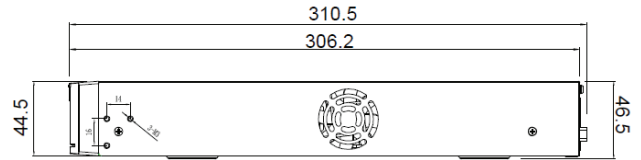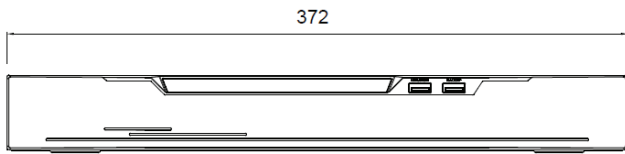

## REAR PANEL



FIRE • SECURITY • INTERCOMS